


# MULTIRAY INFRARED DETECTOR



## M3535 - SERIES

WALL PLUGS MOUNTING

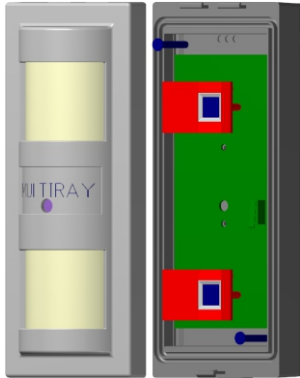

0° 1.4M height  
(from centre of unit)

### Detection Pets Area





## FEATURES

1. Outdoor & indoor installation.
2. Dual optical infrared detection.
3. Digital low frequency filtering.
4. Auto sensitivity adjustment.
5. Latest technology on PIR detection.
6. 24 month local factory warranty.
7. Free Installers training.

### Installation Notes:


- \*Do not install unit facing public roads, unless property has high walls.
- \*Unit must be installed 2m radius away from plants.
- \* Front screw is for tamper & water proofing.
- \*To adjust direction, use bracket supplied.
- \* 99% immunity to false alarms.
- \* To block a portion of detection area, use tape.

### Alternative Detection for Standard Coverage Lens




## SPECIFICATIONS

1. Operating Voltage: 9 -16 volts DC.
2. Current: 8mA N/O - 15mA N/C.
3. Tamper Output: N/C.
4. Relay N/C N/O output switchable.
5. Temperature Range: -10°C to +65°C.
6. Walk Test: LED switchable.
7. Dimensions: 195 x 85 x 60mm.
8. 1.2m height normal installation.
9. 1.4m height pet avoidance.
10. Viewing Angle: 102°, 8-12M.
11. Warm Up Period: 20 seconds.
12. System UV protected.

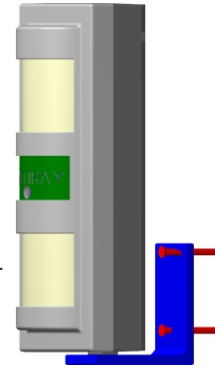

0° 1.2M standard height  
(from centre of unit)

## UNIVERSAL CONNECTION DIAGRAM

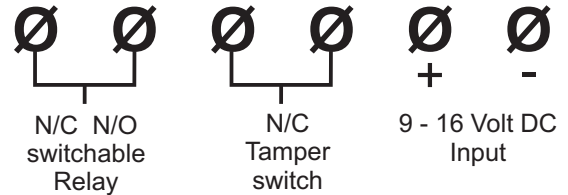

Manufactured in South Africa by Eurolock Security Systems  
Email: info@eurolock.com